

PT-15B

100BASE-T1 Ethernet (BroadR-Reach®)

logging expansion with low latency


The PT-15B expands the Automotive Data Loggers from the Power Family by adding twelve 100BASE-T1 interfaces. Ethernet traffic is looped through the device with constantly low latency irrespective of the frame length. This means that the time synchronization protocols of the logged Ethernet interfaces are not affected. 100BASE-T1 packets are time-stamped, filtered and sent to the Automotive Data Loggers via a 1000BASE-T interface.

KEY BENEFITS

- 12 × 100base-T1 Ethernet (BroadR-Reach®)
- Loop through with constant latency, independent of the frame size
- High performance for full network utilization
- Wake-up and sleep function
- Ethernet filter function
- Cascadable

EXPANSION OF THE POWER FAMILY

Up to two PT-15B units can be connected to the PM-200, which makes it possible to log up to 24 × 100BASE-T1 interfaces.

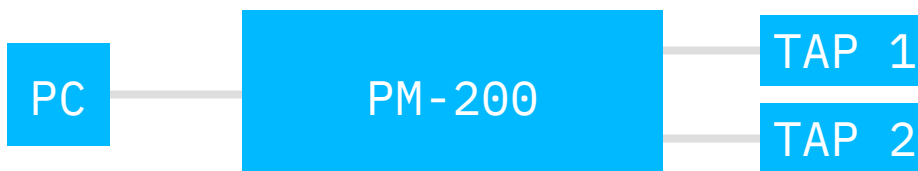

DEVICE SPECIFICATIONS

HARDWARE	2 CPU cores for time-stamp and filter (2 × 800 MHz) 2 GB buffer RAM
LOGGING INTERFACES	1 x Ethernet 1000BASE-T 1 x Ethernet SFP
VEHICLE INTERFACES	12 × 100BASE-T1 (BroadR-Reach®)
LATENCY	1.6 us (irrespective of the packet size)
OPERATING TEMPERATURE	-40°C to +75°C
ELECTRICITY CONSUMPTION	10 W
OPERATING VOLTAGE	6 V to 32 V
DIMENSIONS	150 x 140 x 50mm (L x B x H, height tentative)
WEIGHT	0.95 kg
ORDER NUMBER	12761